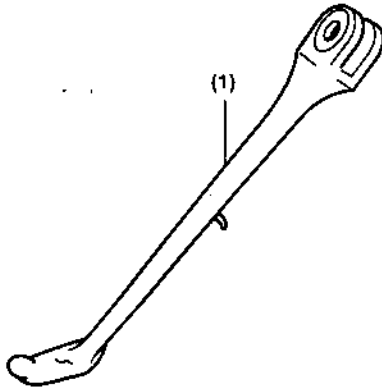



**PARTS LIST**

No.	Description	Q'ty
(1)	Chrome side stand	1


**INSTALLATION****NOTE:**

- The engine and exhaust system will be heated during operation and remain hot immediately after stopping the engine. To prevent scalding, allow the engine and exhaust system to cool before attaching the chrome side stand.
- Use two people when installing the chrome side stand.


1. Place the motorcycle on its center stand on a level, hard surface.
2. Remove the spring from the side stand.

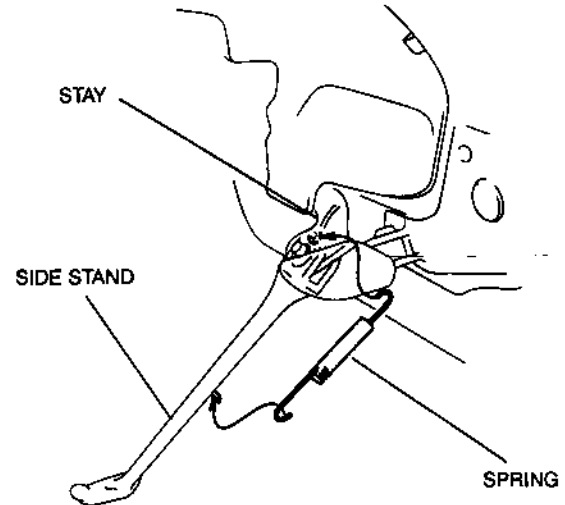

3. Remove the bolt and switch from the side stand.

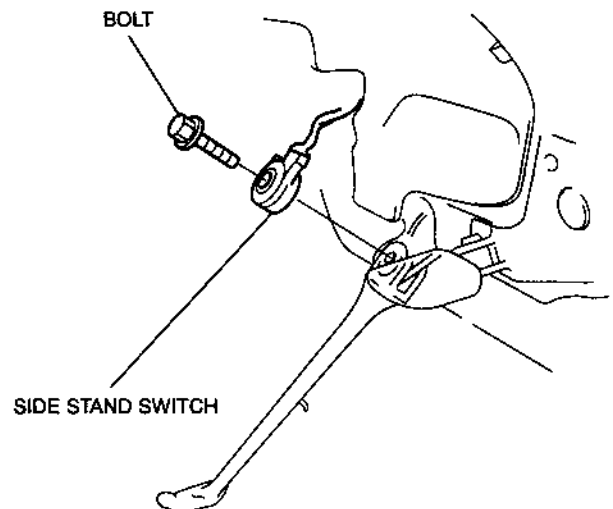

4. Remove the special bolt and the side stand.

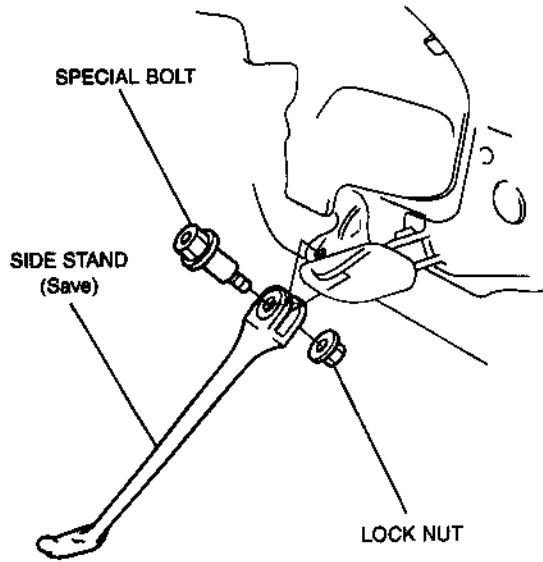

5. Install the chrome side stand in the reverse order of removal.
6. Check the operation of the side stand switch. Also check that all lights work properly.